

2738-03

ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed.
However, the installation instructions do apply to this product.

- ⓘ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ⓘ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box. Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.
2. Slide the electrical wires through the tube (I), and the housing (G). Turn the tube (I) clockwise until tight.
3. Screw the housing (G) to the nipple on tube (I). Secure decorative bars (J) by screwing decorative nuts (H) tightly.

HANG THE FIXTURE (Fig.2)

4. Determine the appropriate hanging height. There are a 6" (D), a 12" (E) and an 18" (F) rod included in the package for height adjustment.
5. Slide the electrical wires through the tubes (D), (E), or (F), turn them clockwise until tight.
6. Secure two mounting screws downward on the mounting plate by tightening the nuts. Make sure the space between them is the same space between the holes on the canopy (B). The side of the mounting plate that contained "GND" should be facing down.
7. Secure the mounting plate to the junction box (not included) by aligning another two mounting screws upward with the holes on the junction box. Tightening the screws with a screw driver.
8. Have someone to support the weight of the light. Connect the electrical wires as shown in **Fig. 3**. Make sure all wire nuts are securely twisted. You may wrap the connections with electrical tape. If your outlet does not have a copper (ground) wire, please wrap the fixture's ground wire around the green screw (GND) on the mounting plate and tighten the green screw.
9. Raise the canopy (B) to the junction box. Feed the two downward mounting screws through the two holes on the canopy (B). Secure with decorative nuts (C).
10. Install light bulbs (not included) in accordance with the fixture's specifications.

NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!

ASSEMBLING THE REFLECTOR (Fig.1)

11. Install the nipple (L) on the coupler, and secure it using the hex nuts. Put the flat washer (M), plastic washer (N) through the nipple. Raise the round glass reflector (O) to the fabric shade, and secure it with the washer (N), bottom finial (P).

Your installation is now complete. Return power to the Junction box and test the fixture.

FIG.1

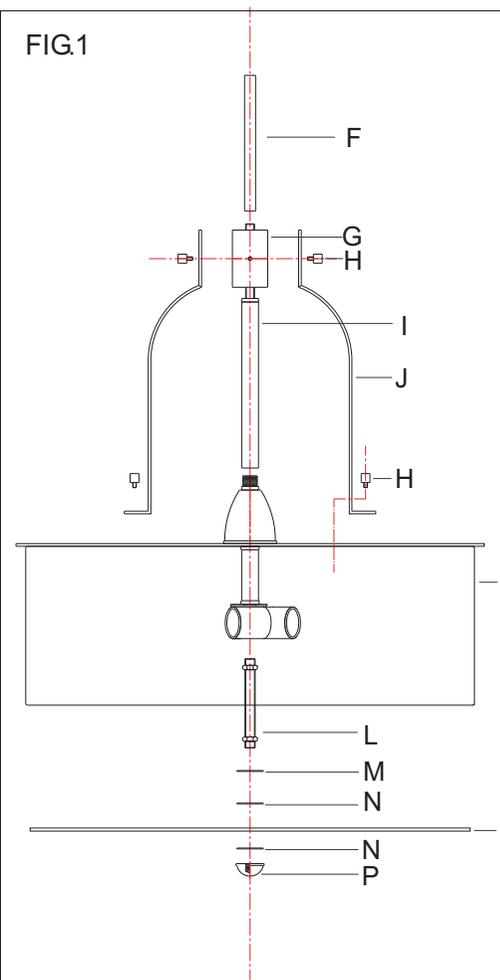


FIG.2

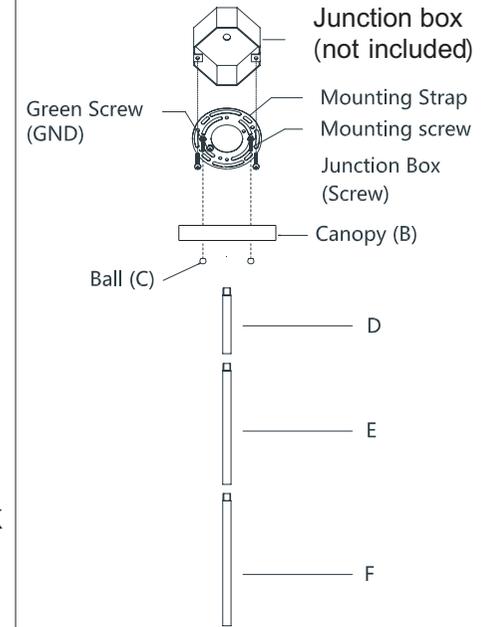


FIG.3

