

# INSTALLATION INSTRUCTIONS

For Model 7117-06

## READ AND SAVE THESE INSTRUCTIONS

These instructions are provided for your safety. It is essential to read them carefully and completely before installing the light fixture. We strongly suggest that all direct-wired fixtures be installed by a qualified, licensed electrician.

**WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER  
BEFORE INSTALLATION**


**AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.**

## ASSEMBLING THE FIXTURE

Adjust three place arms (L) (M) (N) to a desired angle and tighten the allen screws(D) using an allen wrench(H).

## CONNECTING THE WIRES

Attach the fixture's wire to the power supply wires at the junction box. Connect the black wire to the black wire(or smooth), the white wire to the white(or ribbed), the ground wire to the ground wire(green or copper). Twist the end of the wire pairs together, and twist on a wire connector. Make sure all twists are in the same direction. If there is no ground wire(green or copper) from the junction box, locate the ground screw(E) on the mounting plate(A) and wrap the fixture's ground wire around the green ground screw(E). Use a screwdriver to secure the ground screw(E) onto the mounting bracket. Tuck all wires neatly into the junction box.

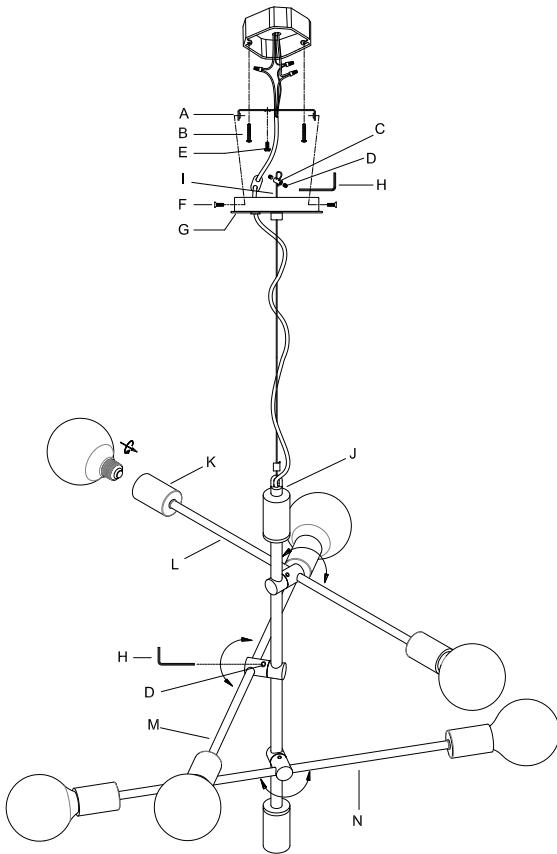

## PREPARING FOR INSTALLATIONS

Remove all contents from the carton. See the important notes above. Shut off the power at the circuit breaker and completely remove the old fixture from the ceiling, including the old mounting strap.

Rotate both of the allen screws (D) clockwise into the binding collar (C) using the allen wrench(H) until tight.


If needed, cut off any remaining excess steel cable (I) using a wire cutter so the steel cable(I) and binding collar (C) can properly fit the inside of the final assembled canopy (G).

Gently pull the existing wire down from the ceiling junction box and allow wires to hang.

Attach the mounting plate (A) to the ceiling outlet box, and align the slots of the mounting plate (A) with two threaded holes located on the J-Box.

Secure the mounting plate (A) by tightening 2 mounting screws (F) with a screwdriver.

Secure the mounting plate(A) to the junction box by securely tightening the mounting screws(F).

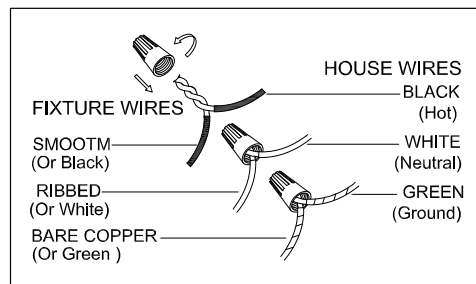

## FINISHING THE INSTALLATIONS

Install light bulb(s) (not included) in accordance with the fixture's specifications.

Do not exceed the recommended maximum wattage.

Your installation is now complete. Turn on the power and test the fixture.

## CLEANING TIPS

Treat the fixture gently! Regular cleaning will reduce the need for deep cleaning. For regular cleaning, turn off the light and wipe down the fixture with a clean lint-free cotton or microfiber cloth. Never spray cleaner directly onto the fixture.